

12.11.2021

ROBE GDTF files library update


Products Involved

iBar 15[™] FORTE[®] FORTE[®] FS DL4X Spot[™] iSpiider[®] iPointe65[®] CUETE[®] T2 Fresnel[™] T2 PC[™] iParFect 150[™] FW RGBW

Our technical team at Robe, together with a Robe dedicated GDTF (General Device Type Format) in house library maintainer, has been working on ensuring that when new products are released, correct GDTF file is made available for controlling, visualization or planning. Read on for more details.

After starting the GDTF initiative in 2018 as a member of the GDTF group, we have been focusing on providing specification and tools for convenient creation of the General Device Type Format files. You can read more about this innovative format in our dedicated GDTF page.

If you are interested in the GDTF Specification, you can find it in the form of DIN SPEC 15800 here. GDTF Builder (a tool to create GDTF files) is also publicly available online to anyone. ROBE GDTF files library is available here on a dedicated page.

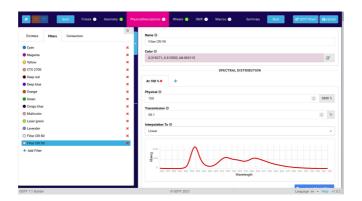

To help to understand the benefit to the user workflow and cooperation, see for example this OnLocation special with Veith Schmidt, where he talks about how teams can use this unifying format to work together without having to duplicate their work and effort.







In order to be able to do this level of coordination and cooperation Veith Schmidt is talking about, we provide comprehensive GDTF files for our devices. The Robe GDTF files library is available through the GDTF Share. Our files include a lot of technical data which is needed to organize and control devices in any kind of event.




We have been ensuring that every new product that we release is accompanied with a complete, comprehensive GDTF file. Here is an example of the initial description for FORTE®:



The data inside the GDTF file provide many details, including...

Device description like name, RDM ID for identification by controllers, power consumption, picture, 2D vector image for planning tools, weight, power consumption and many more data, required for planning and pre-show calculations:

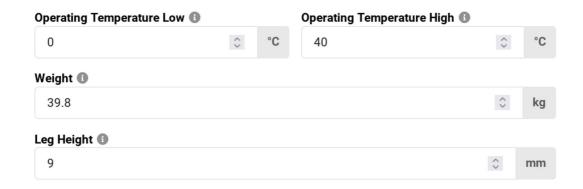


Tel: +420-571-751500

Fax: +420-571-751515 Email: info@robe.cz




3D model is provided in a way that clearly identifies each part of the device, including the base, cable connection panel, yoke, head and also for example the lens or lenses of the fixture, which, in case of for example the Spiider or Tarrantula, allows for very nice, realistic visualization.



DMX description contains all DMX modes, their identification via RDM and also their description for the operator, to be able to understand which DMX Mode is most suitable for their mode of operation.

DMX Modes						
▼ Mode 1 - Standard 16 bit v0001->0001						
1, 2	Yoke_Pan	×				
3, 4	Head_Tilt	×				
5	Base_PositionMSpeed	×				
6	Base_Control1	×				
7	Base_LEDFrequency	×				
8	Base_LEDFrequencyAdjust	×				
9	Base_IntensityIndication	×				
10, 11	Head_Color1	×				
12, 13	Head_Color2	×				

Included Color spectral power distribution data for lamps, LEDs, color flags and color wheels allow the controller to calculate DMX values for a particular color which a lighting designer is requesting. This also provides the possibility to select a desired spectral settings to not only achieve the perfect color but also it's spectral characteristic. This further allows to combine many fixtures of various manufacturers on a single stage and achieve the same color output from all devices (given that they provide GDTF with the spectral power distribution).

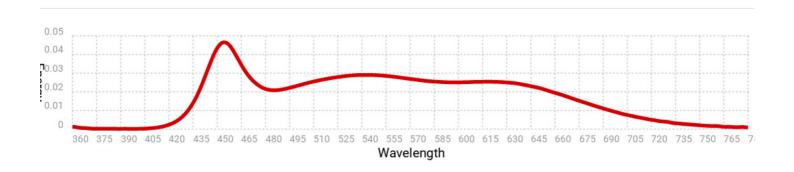



Graphics content of the GDTF files is including for example gobo images but also definitions for animation wheels, prisms and other effects.


▼ GoboWheel1	▼ GoboWheel2	▼ Color wheel 1	▼ Color wheel 2
○ 1 Open	○ 1 Open	○ 1 Open	○ 1 Open
2 G01	❸ 2 G01	2 Deep red	🎒 2 Multicolor
3 G02	3 G02	3 Deep blue	O 3 Laser green
4 G03	4 G03	4 Orange	4 Lavender
5 G04	⊗ 5 G04	5 Green	O 5 Filter CRI 80
6 G05	6 G05	■ 6 Congo blue	○ 6 Filter 90 CRI

The data contains many more details, for example speeds of movements or strobing frequencies, zoom ranges and so on.


This year, we have had many additions to our Robe GDTF files library (available here), including iBar 15[™], CUETE®, T2 Fresnel™, T2 PC™, iPointe65®, FORTE®, FORTE® FS, iParFect 150™ FW RGBW, iSpiider® or DL4X Spot™.

If there is a fixture for which we do not provide a GDTF file or if you find an error in any of our files, feel free to contact us at a dedicated email address libraries@robe.cz, we are more then happy to create new files or provide support for existing ones.




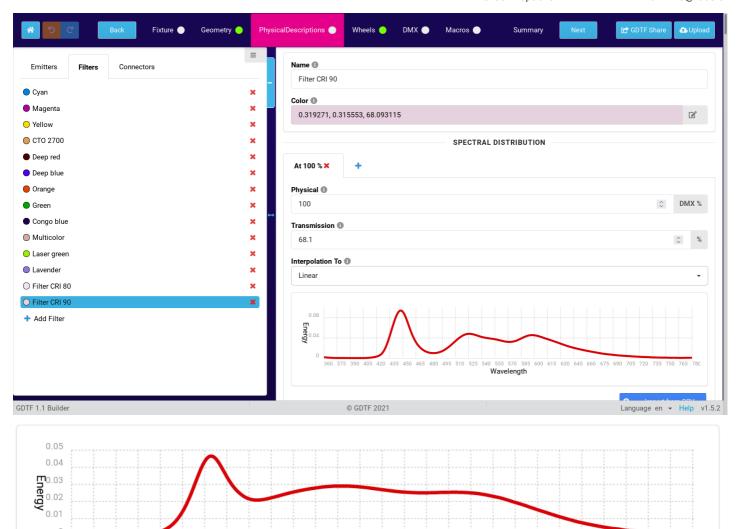

360 375 390 405 420 435 450 465 480 495 510 525 540 555 570 585 600 615 630 645 660 675 690 705 720 735 750 765 780 Wavelength

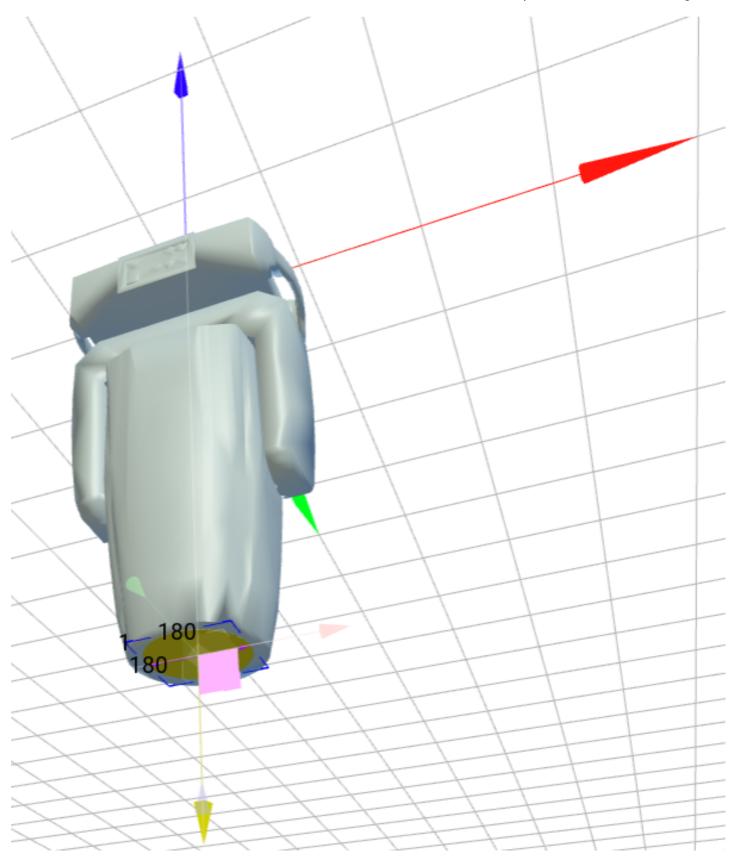



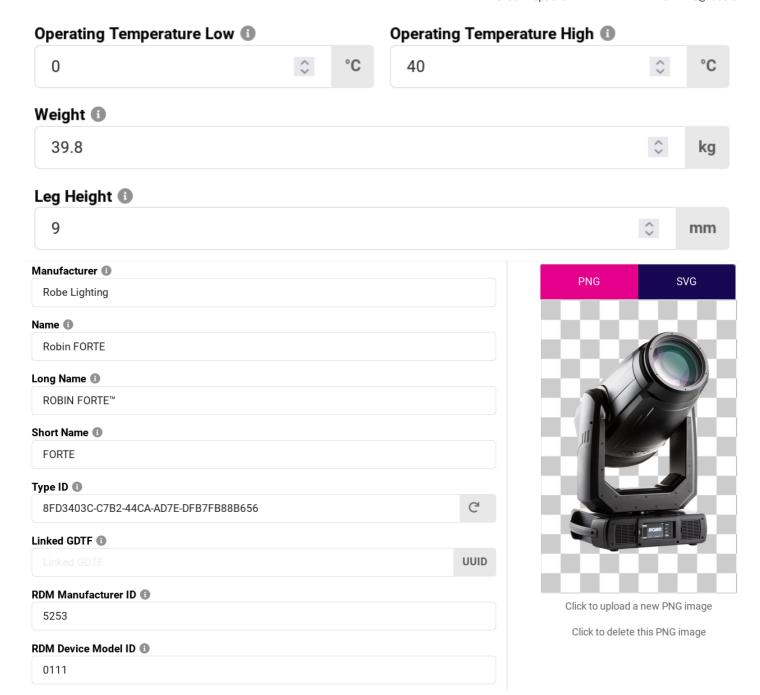




WE PROUDLY SUPPORT



DMX Modes



•	Mode	1 - Standard 16 bit v0001->0001	Z ×	
	1, 2	Yoke_Pan	×	
	3, 4	Head_Tilt	×	
	5	Base_PositionMSpeed	×	
	6	Base_Control1	×	
	7	Base_LEDFrequency	×	
	8	Base_LEDFrequencyAdjust		
	9	Base_IntensityIndication		
	10, 11	Head_Color1	×	
	12, 13	Head_Color2	×	



6 Congo blue



6 G05

Tel: +420-571-751500 Fax: +420-571-751515 Email: info@robe.cz

O 6 Filter 90 CRI

▼ GoboWheel1 ▼ GoboWheel2		▼ Color wheel 1	▼ Color wheel 2	
	○ 1 Open	○ 1 Open	○ 1 Open	○ 1 Open
	2 G01	❸ 2 G01	2 Deep red	2 Multicolor
	3 G02	3 G02	3 Deep blue	O 3 Laser green
	4 G03	4 G03	4 Orange	4 Lavender
	5 G04	⊗ 5 G04	5 Green	○ 5 Filter CRI 80

6 G05